


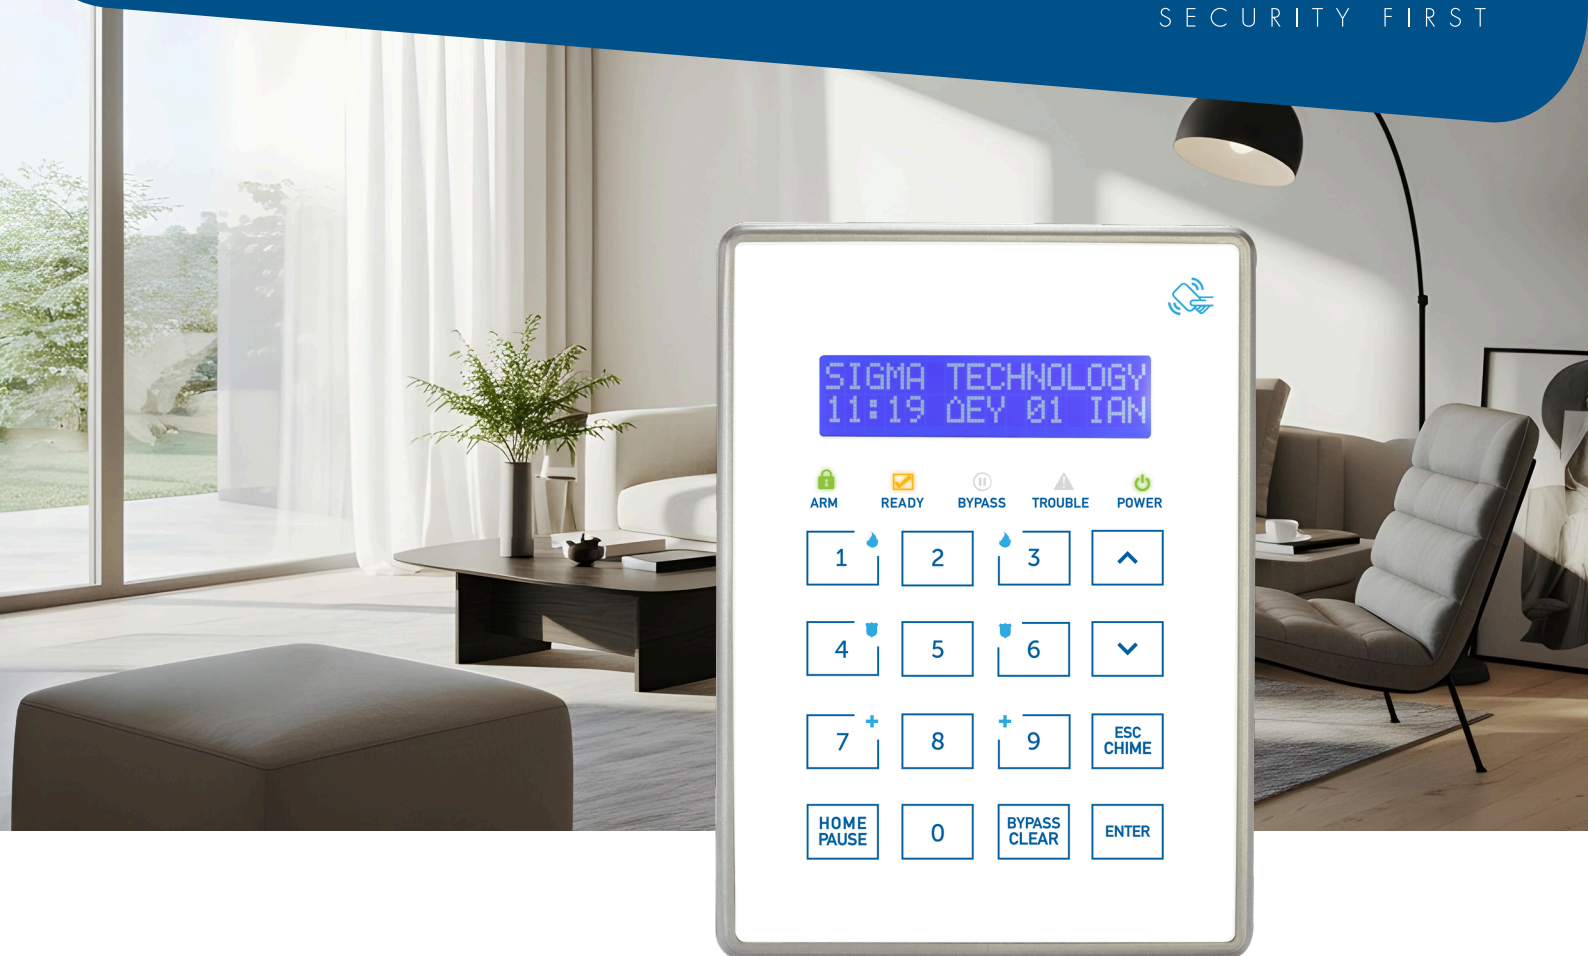

AEOLUS

Illuminated touch. Smart control.

The **AEOLUS** keypad brings together illuminated touch keys, a built-in RFID card reader and a room thermostat in a slim body just 1.9 cm deep.

It is the heart of Sigma Security's **AEOLUS** hybrid alarm system: up to 32 wired or wireless zones, programmable outputs and a wide range of wireless peripherals, from PIR and dual-technology motion detectors to smoke detectors, magnetic contacts and 4-button remote controls.

A complete solution for small and medium-sized premises: easy for the installer to tailor, effortless for the user every day.

RFID

Built-in reader

1.9 cm

Slim profile

32

System zones

8

Keypads per panel

Features

Keypad

- Illuminated touch keys
- 5 system status LEDs
- With or without built-in RFID card reader
- Night lighting with independent settings for display, keys and perimeter light
- Built-in thermostat with 5 daily programs, automatic or manual mode
- Buzzer with individual volume setting
- Zone input for magnetic contact or detector
- Greek-language operating and programming menu
- Dimensions: 9.5 × 13 × 1.9 cm

AEOLUS system

- 8 or 16 zones, expandable up to 32
- 2 independent partitions
- 2 PGM outputs, expandable up to 12
- Up to 8 keypads per panel via S-BUS
- Arm / disarm with RFID cards
- Reporting to 2 monitoring stations
- Up/Downloadable, locally or remotely
- 300-event memory, 97 user codes



RFID



PLUG
&PLAY



TOUCH
KEYPAD



S MOBILE
CLOUD



FIRMWARE
UPGRADE



MOTION
DETECTOR
ZONE



S-BUS



S-LOAD
LITE

The AEOLUS hybrid panel

Communication

- Built-in communicator with separation of primary and secondary events
- Optional multi-message voice dialler
- Optional telephone remote control with Greek voice menu
- Call back function

Arming

- Quick and perimeter arming, arming with bypassed zones
- Selective or simultaneous arming of all partitions
- Automatic arm / disarm with 2 daily programs

Protection & power

- EEPROM memory, Watchdog and Brown Out Reset
- Lightning protection on the telephone line
- 110–220 VAC, 13.8 V DC / 1.5 A switching PSU
- Enclosure: SB 23×30×8 cm, MB 30×30×8 cm



6 YEARS
WARRANTY



GREEK
PRODUCT



MADE IN
EUROPE